



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Unity processor

### Complementary

Mode of transmission	Multi mode
Clock frequency	266 MHz
Number of slots	16 4 6 2 10
Number of racks	2 - local rack(s)
Number of distributed I/O station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number of remote I/O station	0 - 0 ethernet Quantum remote I/O rack(s) 6 - 2 ethernet X80 remote I/O rack(s) 0 - 0 S908 remote I/O rack(s)
Discrete I/O number	0 - local - forbidden in Hot Standby application 8000 inputs, 8000 outputs - distributed - per network Modbus Plus 0 - S908 remote I/O - not configurable Up to 6 drops X80 - ethernet remote I/O
Analogue I/O number	0 - local - forbidden in Hot Standby application 500 inputs, 500 outputs - distributed - per network Modbus Plus 0 - S908 remote I/O - not configurable Up to 6 drops X80 - ethernet remote I/O
Application specific I/O	Counter High-speed interrupt inputs Accurate time stamping Serial link
Communication service	Ethernet router
Number of optional modules	3 ( Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum number of connections	1 ( USB) 2 ( AS-Interface) - distributed 4 ( AS-Interface) - remote 1 ( Modbus) - RS232/485 Modbus/ASCII 3 ( Ethernet TCP/IP) - local 3 ( Modbus Plus) - local 3 ( Profibus DP) - local
Integrated connection type	1 Modbus Plus with

	1 Modbus with 1 USB with 1 optic fibre with Hot Standby protocol
Checks	Hot standby Process control
Memory description	Internal RAM 512 kB - 512 kB for data Expandable 7168 kB - program with PCMCIA card Expandable 8 MB - file storage with PCMCIA card
Switch function	Key switch memory port on/off
Application structure	1 cyclic/periodic master task - 1 periodic fast task - forbidden in Hot Standby application 128 I/O interrupt tasks - forbidden in Hot Standby application 128 interrupt tasks - forbidden in Hot Standby application 32 timer interrupt tasks - forbidden in Hot Standby application 4 auxiliary tasks - forbidden in Hot Standby application
Number of instructions per ms	10.28 Kinst/ms if 100 % Boolean 10.07 Kinst/ms if 65 % Boolean and 35 % numerical
System overhead	1 ms - master task 0.2 ms - fast task
Bus current requirement	2500 mA
Local signalling	1 LED green Ethernet activity (COM) 1 LED red Ethernet collision
Electrical connection	1 connector, connector type: RJ45 for connecting Modbus bus 1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network 1 connector, connector type: MT-RJ (multimode fiber optic) for interconnecting primary and secondary PLCs up to 4 km

## Environment


Product certifications	CSA UL Misc (Marine) GOST CE
Standards	HazLoc

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1111 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

Racks for Modules Mounting

Dimensions of Modules and Racks

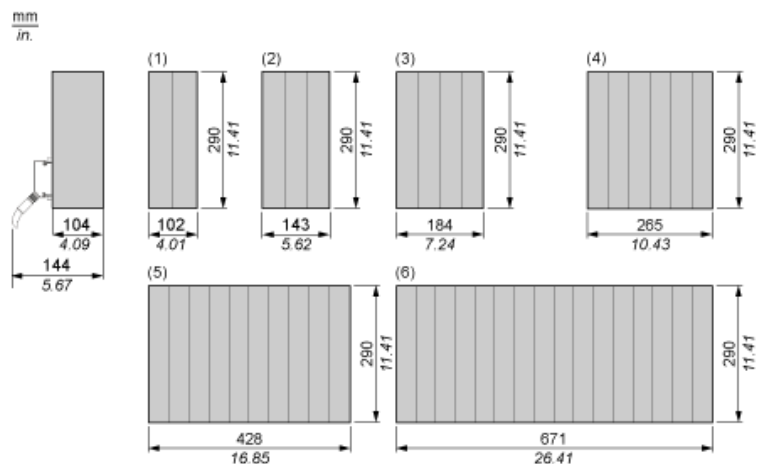

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Product Life Status

END OF COMMERCIALIZATION